



672-A

672-A

THYRATRON

MERCURY-VAPOR TETRODE

*Supersedes type 672*GENERAL DATA**Electrical:**

Heater, for Unipotential Cathode:

Voltage. 5 ac or dc volts

Current. 5 amp

Cathode:

Min. Heating Time, prior to tube conduction. . . 5 minutes

Direct Interelectrode Capacitances:

Grid No.1 to Anode 0.04 μ fGrid No.2 to Anode 3 μ fIonization Time (Approx.). 10 μ secDeionization Time (Approx.). 1000 μ secMaximum Critical Grid Current. 2 μ amp

Anode Voltage Drop (Approx.) 12 volts

Mechanical:

Mounting Position. Vertical, Base Down

Overall Length 7-7/8" \pm 1/4"Seated Length. 7-1/8" \pm 1/4"

Maximum Diameter 2-5/16"

Bulb T-18

Cap. Skirted Medium

Base Large-Shell Super-Jumbo 4-Pin, Bayonet

Basing Designation for BOTTOM VIEW 4CE

Pin 1-Grid No.1

Pin 2-Heater,
Cathode

Pin 3-Heater

Pin 4-Grid No.2

Cap - Anode

GRID-CONTROLLED RECTIFIER SERVICE*For frequencies up to 150 cycles***Maximum Ratings, Absolute Values:**

PEAK ANODE VOLTAGE:

Forward. 2500 max. volts

Inverse. 2500 max. volts

GRID-No.2 (SHIELD-GRID) VOLTAGE:

Peak, before anode conduction. -300 max. volts

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Peak, before anode conduction. -1000 max. volts

CATHODE CURRENT:

Peak 40 max. amp

Average 3.2 max. amp

Surge, for duration of 0.1 sec. max. 150 max. amp

■ See next page.

(continued on next page)

JUNE 1, 1948

TUBE DEPARTMENT

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

672-A



672-A THYRATRON

GRID-No.2 CURRENT:

Peak	1 max.	amp
Average [■]	0.25 max.	amp

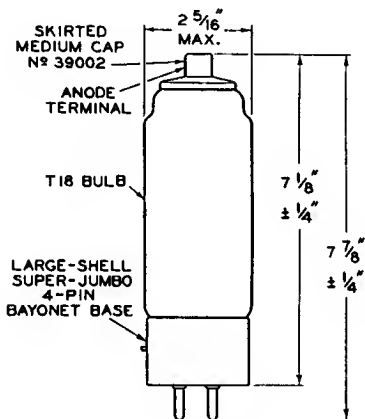
GRID-No.1 CURRENT:

Peak	1 max.	amp
Average [■]	0.25 max.	amp

COND.-MERCURY TEMPERATURE RANGE [▲]	40 to 80	°C
--	----------	----

■ Averaged over any interval of 15 sec. max.

▲ Recommended condensed-mercury temperature is between 45° and 50°C.



BOTTOM VIEW OF BASE

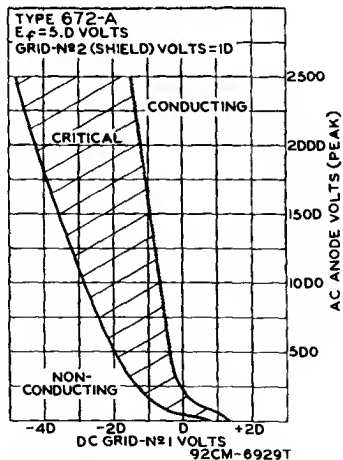
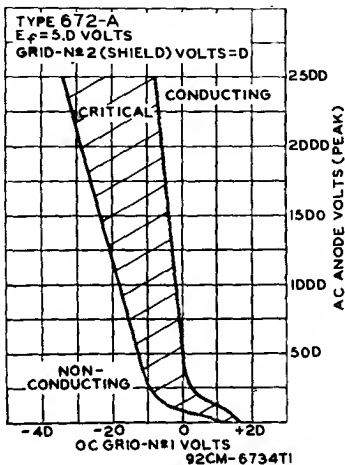
92CS-6735R1



672-A

THYRATRON

672-A

OPERATIONAL RANGES
OF CRITICAL GRID-Nº1 VOLTAGE

SEPT. 30, 1948

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6734T1-6929T